(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 12 May 2005 (12.05.2005)

PCT

(10) International Publication Number WO 2005/042897 A1

(51) International Patent Classification⁷: 1/28, 1/52

E06B 1/16,

(21) International Application Number:

PCT/AU2004/001519

(22) International Filing Date:

3 November 2004 (03.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2003906042 3 November 2003 (03.11.2003) AU

- (71) Applicant (for all designated States except US): ROAM SAFE PTY LTD [AU/AU]; PO Box 338, Helensvale, QLD 4212 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): KERRY, Jackson [AU/AU]; C/-Roam Safe Pty Ltd, PO Box 338, Helensvale, QLD 4212 (AU).


- (74) Agent: AHEARN FOX; Patent and Trade Mark Attorneys, Level4, T & G Building, 141 Queen Street, Brisbane 4001 (AU).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

[Continued on next page]

(54) Title: SECURITY DOOR FRAME FOR RECREATIONAL VEHICLES

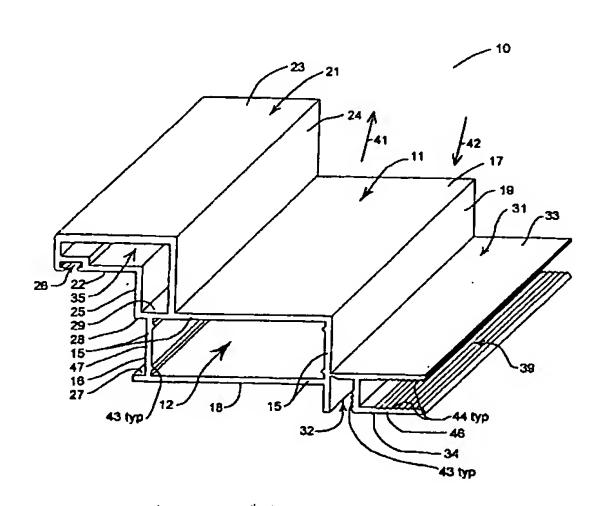

(57) Abstract: A security door frame for recreational vehicles including a hollow main frame portion comprising a main wall surrounding an internal bore, the main wall including a latch assembly mounting face for mounting a latch assembly thereto such that at least part of the latch assembly can extend into the internal bore; an architrave lapping portion attached to and extending from the main wall of the main frame portion adjacent the latch assembly mounting face and having an architrave lapping face for lapping an architrave and a hinge mounting face substantially parallel to the architrave lapping face; and a screen mounting portion attached to and extending from the main wall of the main frame portion remote from the architrave lapping portion, the screen mounting portion having a screen spline channel adapted for receiving a screen mounting spline; the parts being so formed and arranged that a screen panel when mounted to the screen mounting portion is spaced from the hinge mounting face a distance sufficient to receive door furniture of a door when closed against the hinge mounting face of the architrave lapping portion.



2005/042897

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.